



2001A/600 Classic Recording Pack

Marshall Electronics, Inc.
1910 East Maple Ave. El Segundo, CA 90245
Phone: (310) 333-0606 Fax: (310) 333-0688
E-mail: Sales@mxlmics.com
Internet: www.MXLmics.com

Thank you for purchasing the MXL® 2001A/600 Classic Recording Pack. With proper care, these microphones will provide many years of satisfaction. For best results, please take a few moments to review this literature.

General Characteristics

The MXL® 2001A and MXL® 600 microphones both have gold-sputtered diaphragms and a fixed cardioid pickup pattern. Condenser microphones are very sensitive, readily revealing very subtle sonic details. They also tend to pick up sounds outside the pattern more than some designs, which can lead to powerful feedback if you are not careful. We strongly advise experimentation with placement and isolation requirements with the gain initially set low to avoid equipment (and ear) damage. It is strongly advised to use a mesh pop-filter when recording vocals to avoid moisture damaging the capsule.

Power Requirements

IMPORTANT - These units require phantom power at 48 volts, +/- 4 volts. Each unit has been thoroughly checked before shipping, so if you hear no sound, check that the phantom power on your mixer or separate power supply is switched on!


Microphone Cables

The microphone cable can have a profound effect on the sound of any microphone. Even the finest microphones will sound poor if the interconnect cable allows noise to enter, or causes distortion and loss of information. Use only the best microphone cable your budget will allow. We recommend using Mogami® brand cables.

Care


Dust and foreign material can degrade the performance of a microphone over time so always store the unit in its case. Clean the contacts occasionally with a de-oxidant/cleaner.

MXL® 2001A

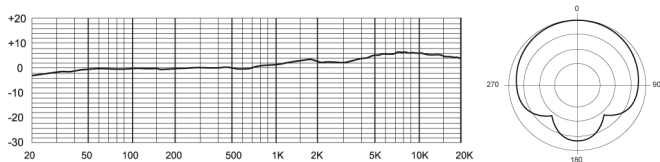

Type:	Pressure gradient condenser microphone
Frequency Range:	20 Hz – 20 kHz
Polar Pattern:	Cardioid
Sensitivity:	15mV/Pa
Impedance:	200Ω
S/N Ratio:	80dB (Ref. 1Pa A-weighted)
Equivalent Noise Level:	20dB(A weighted IEC 268-4)
Max SPL for 0.5% THD:	130dB
Power Requirements:	48V Phantom Power (+/- 4V)
Current Consumption:	<3.0mA
Size:	50mm x 190mm
Weight:	1.2 lbs
Metal Finish:	Black with gold print

MXL® 600

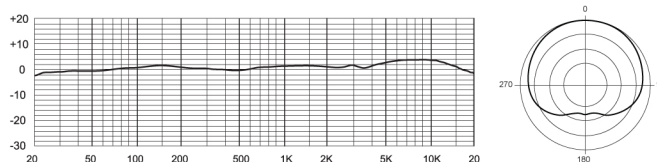

Type:	Pressure gradient condenser microphone
Frequency Range:	30 Hz – 20 kHz
Polar Pattern:	Cardioid
Sensitivity:	10mV/Pa
Impedance:	200Ω
S/N Ratio:	80dB (Ref. 1Pa A-weighted)
Equivalent Noise Level:	18dB(A weighted IEC 268-4)
Max SPL for 0.5% THD:	134dB
Power Requirements:	48V Phantom Power (+/- 4V)
Current Consumption:	<3.0mA
Size:	22mm x 135mm
Weight:	0.35 lbs
Metal Finish:	Nickel

Warranty

Marshall microphones are guaranteed against defects in material and workmanship for three years from date of purchase. Should you encounter any problem with this unit, promptly contact the company you purchased it from for assistance. The original dated sales receipt will be necessary for any warranty claim. Do not send any unit directly to us without prior authorization from our service department! Warranty coverage is limited to repair or replacement (at our option) of the microphone, and does not cover incidental damages due to use of this unit, nor damage caused by accidental misuse of this product.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>