


Serious cleaning demands a truly professional machine

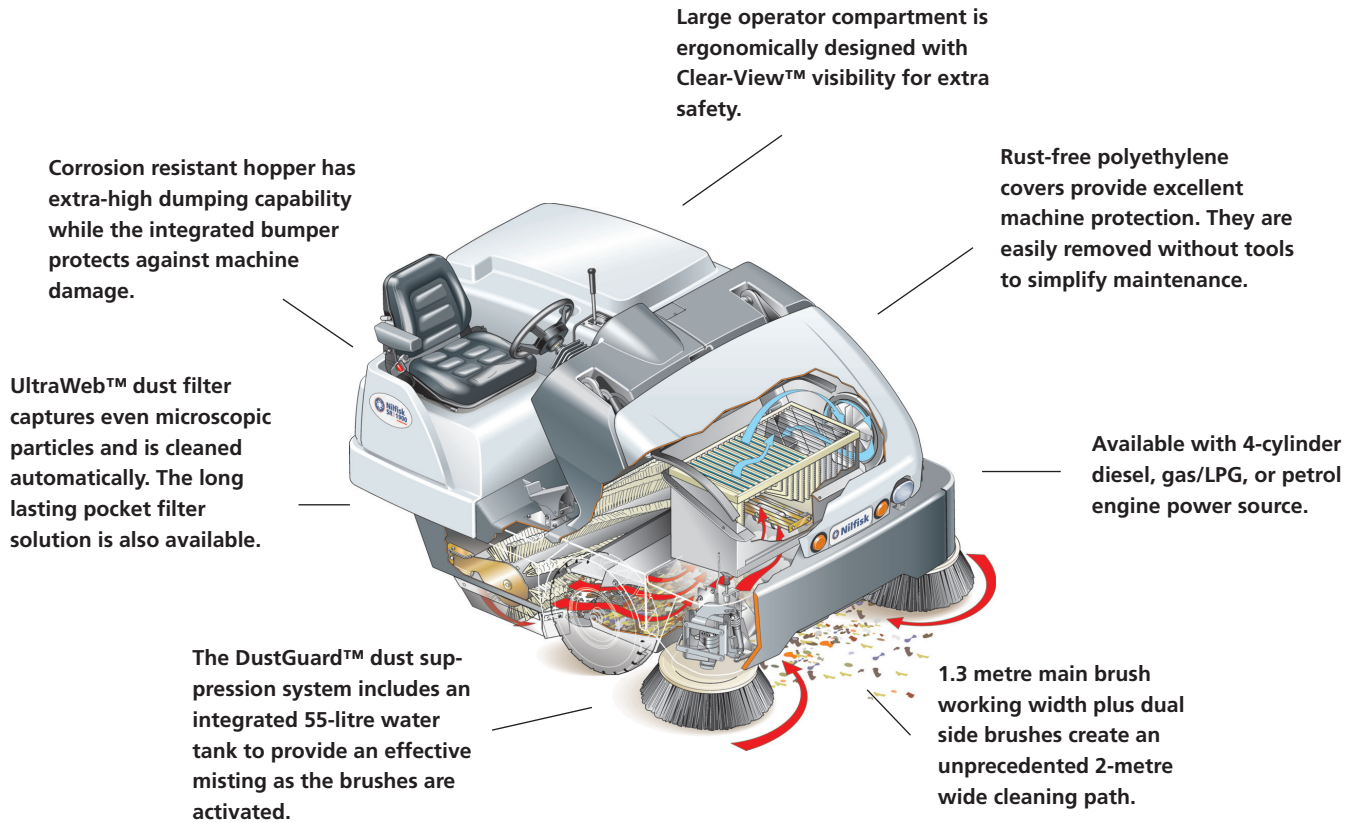

TECHNICAL SPECIFICATIONS

CE

Description	Unit	SR 1900 D	SR 1900 LPG	SR 1900 P
Motor power source		Diesel, 4cyl., 26.5Kw/35.5Hp	GAS/LPG, 4 cyl., 41.7Kw/56Hp	Petrol, 4 cyl., 41.7Kw/56Hp
Motor brand		Kubota V1505D	PSI-GM Vortec 1600	PSI-GM Vortec 1600
Productivity rate theoretical/ actual	m ² /h	30,000/21,000	30,000/21,000	30,000/21,000
Working width with mainbroom	mm	1300	1300	1300
Working width with right side brush	mm	1650	1650	1650
Working width with 2 side brushes	mm	2000	2000	2000
Min. turn-around aisle width	cm	277	277	277
Max. speed	km/h	15	15	15
Hopper volume	l	400	400	400
Max. dumping height	cm	152	152	152
Main filter area	m ²	10	10	10
Length x width x height	cm	239x163x147	239x163x147	239x163x147
Weight	kg	1225	1225	1225

Specifications and details are subject to change without prior notice.



Nilfisk-Advance Limited,
Unit 24, Hillside Business Park
Kempson Way
Bury St. Edmunds,
Suffolk IP32 7EA
Tel. (01284) 763163
Fax (01284) 750562
www.nilfisk.com

Industrial sweeper

Nilfisk SR 1900

2 metres wide sweeping path!



Technically superior and environmentally friendly



Operation of the SR 1900 could not be easier. One-Touch™ control shortens operator-training time and improves the cleaning result.

The Nilfisk SR 1900 represents a huge step forward in industrial class ride-on sweepers. With its extraordinary 2 metres wide sweeping path, the SR 1900 can sweep and clean large areas, such as parking lots, warehouses, factory floors and construction sites, in a fraction of the time it takes a conventional sweeper. Moreover it does this while efficiently controlling the dust, thanks to the innovative DustGuard™ misting system.

Furthermore the SR 1900 is designed with attention to details such as better safety features, easier operator control, simple maintenance and function features that provide higher productivity and a lower total cost of cleaning.

2 metres wide sweeping path!

- The unique DustGuard™ feature with misting nozzles that spray a fine fog of moisture to the front and side brushes, effectively controls airborne dust for a cleaner environment.
- The main brush's 1.3 metre sweeping path is the widest in the industry, enabling better productivity through faster cleaning. Total cleaning width with side brushes is 2 metres.
- The strong polyethylene covers offer a high driving protection and even absorbing bumps up to 8 km/h. At the same time, they are fully recyclable in line with Nilfisk's environmental-awareness policy.
- The large-area operator compartment provides more comfort with less fatigue. One-Touch™ control and a clear view of the working zone give a better cleaning result with greater safety.




www.nilfisk.com



The exclusive DustGuard™ system effectively controls airborne dust by providing a fine mist of moisture to the front and side brushes.



The large wheels give a smoother ride and allow the machine to mount kerbs without difficulty.



Exceptionally easy serviceability is achieved with Nilfisk's NoTools™ system. The 5-sided access to engine and hydraulic components saves time and keeps down the service cost.



The SR 1900 incorporates superb high-dump capability up to 152 cm from ground level.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>