


Axor Starck Widespread Lavatory Set

10135XX1

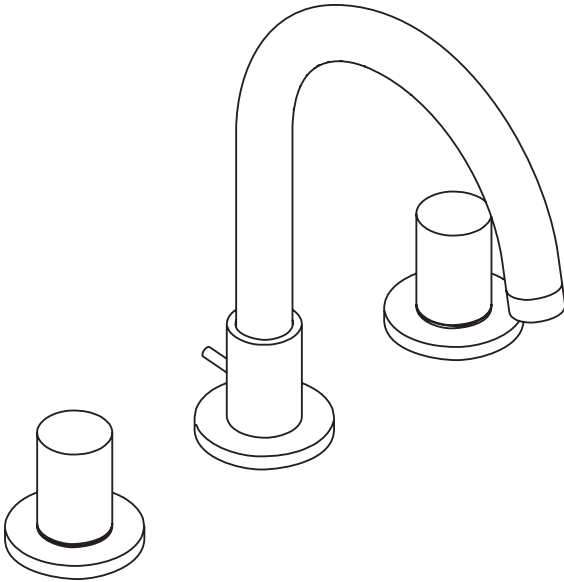

Product Features

- 90° Ceramic cartridges
- Spout swivels 150°
- Flexible connection hoses accommodate a variety of installations
- Cascade no-clog aerator
- 2.2 gpm max.
- Includes pop-up drain

Code Compliance

This unit meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- Listed by IAPMO
- Approved for use in Massachusetts


Available Finishes

Chrome

10135001

Brushed Nickel

10135821

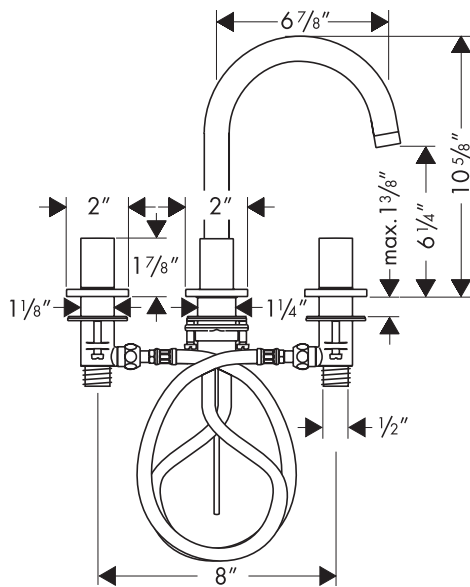

Installation Notes

- Requires 1/2" supply lines
- Hole sizes in mounting surface: valve 1 1/4", spout 1 3/8"
- Max. thickness of mounting surface 1 3/8"

The measurements shown are for reference only.

Products and specifications shown are subject to change without notice.

Specification sheet revised 1/2008

AXOR[®]
hansgrohe

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>