


SV-8400.RM

Installation Instruction

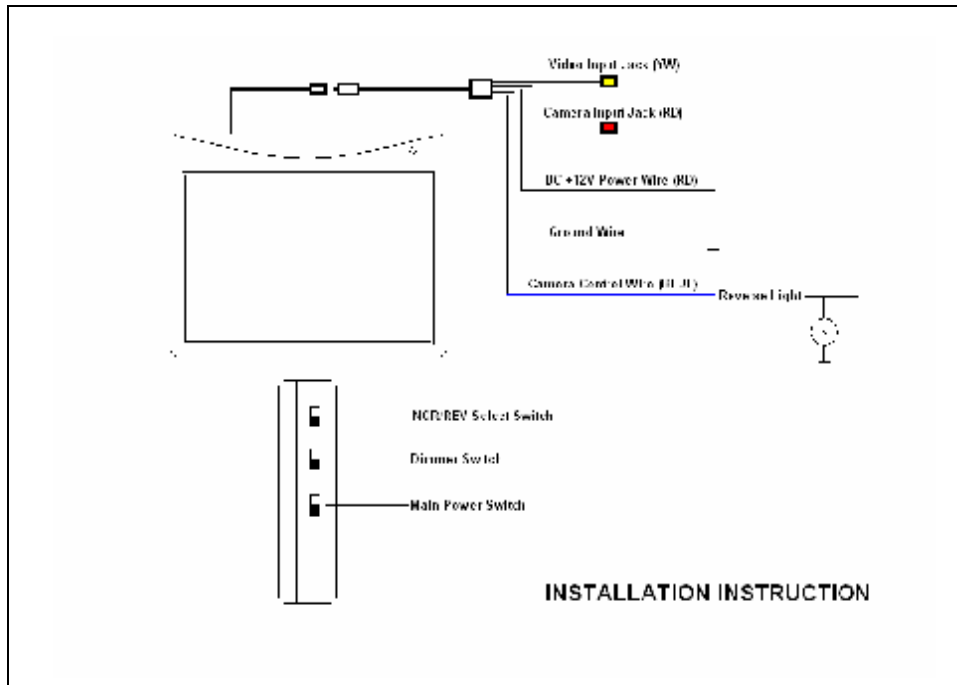

CONNECTIONS AND OPERATION

1. CONNECT THE RED WIRE TO +12V DC, PLEASE NOTE THE "RED POWER WIRE" HAS TO CONNECT TO A POSITIVE 12 VOLT CONSTANT POWER SOURCE OF POWER AND THE "BLACK WIRE GROUND WIRE" SHOULD BE CONNECTED TO A GOOD CHASSIS GROUND LOCATION OR THE NEGATIVE TERMINAL OF THE BATTERY.
2. MOVE THE " MAIN POWER SWITCH" ON SIDE OF MONITOR TO THE ON POSITION. THE MONITOR WILL AUTOMATICALLY TURN ON AND OFF WHEN MONITOR IS DROPPED DOWN FROM LOCKED POSITION.
3. CAMERA INPUT SIGNAL COMES FROM REAR VIEW CAMERA AND PLUGS INTO "CAMERA INPUT (RED) RCA JACK.
4. OPTIONAL VIDEO SIGNAL COMES FROM VCD, VCR, OR DVD AND PLUGS INTO "VIDEO INPUT (YELLOW) RCA JACK.
5. BACKUP CAMERA CONTROL WIRE (BLUE) CONNECTS TO +12 VOLTS DC OF CAR REVERSE LIGHT WIRE, WHEN THE GEAR IS IN REVERSE, THE MONITOR IMAGE WILL AUTOMATICALLY SWITCH TO THE BACK UP CAMERA.
6. USE "NOR/REV SELECTOR SWITCH" TO CHOOSE THE MIRROR OR NON-MIRROR IMAGE.
7. MOVE THE "DIMMER SWITCH" TO SELECT BRIGHTNESS OF IMAGE.

CRIMESTOPPER

Crimestopper Security Products Inc.
1770 So. Tapo Street
Simi Valley, CA 93063
(800) 998-6880
www.crimestopper.com
©2008 Crimestopper Security Products

PRECAUTIONS

1. INSTALL THE MONITOR IN A CONVIENT LOCATION AWAY FROM EXTREME HEAT & COLD AND MAKE SURE THE SCREEN IS NOT IN DIRECT SUNLIGHT.
2. AVOID DUST AND HIGH HUMIDTY.
3. AVOID STRONG DROPPING AND IMPACT
4. MAINTENANCE IS ONLY TO BE CARRIED OUT BY TECHNICIANS TRAINED BY THE MANUFACTURER.

SPECIFICATIONS

| | |
|--------------------------|------------------------------------------------------------------------------------------------------------------------|
| TYPE: | COLOR LCD TV/MONITOR |
| DISPLAY SCREEN: | SIZE: 3.5 INCHES (72x51mm WxH) ELEMENT: TFT COLOR FORMAT: 480x234(WxH) 112,320 DOTS |
| BACK LIGHT: | COLD CATHODE FLUORESCENT LAMP |
| POWER SUPPLY: | CAR BATTERY (DC 12V) |
| POWER CONNECTION: | DC 12V 4W |
| CONNECTION TERMINALS: | DC+12V INPUT WIRE (RD) DC GROUND WIRE (BK) CCD CONTROL WIRE (GN) VIDEO INPUT JACK (YW) CCD INPUT JACK (RD) |
| OPERATION TEMP: | +0°C ~ +40°C |
| STORAGE TEMP: | -20°C ~ +60°C |
| DIMENSIONS: | 100x94x25mm (WxHxD) |
| WEIGHT: | 280g |

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>