

# SMT Power Inductor

## HAH73 Type


### Features

- RoHS compliant.
- Low profile (3.0mm max. height) SMD type.
- Magnetically shielded, suitable for high density mounting.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor application.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.



### Mechanical Dimension:

### RECOMMENDED PAD PATTERNS

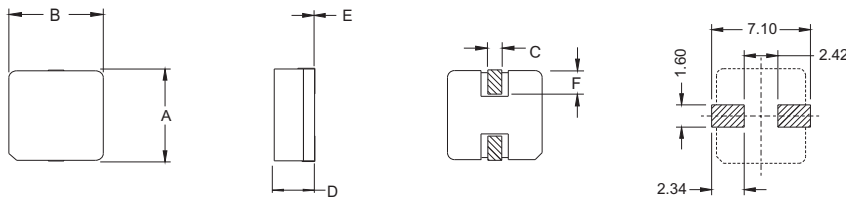

UNIT : mm / inch  
 A = 7.90 / 0.311 Max.  
 B = 7.00 / 0.276 Max.  
 C = 1.20 / 0.047 Ref.  
 D = 3.00 / 0.118 Max.  
 E = 0.01 / 0.0004 Min.  
 F = 1.90 / 0.075 Ref.

### Electrical Characteristics: At 25°C , 100KHz, 1V

PART NO.	Lo <sup>1</sup> (uH)	Li (uH) ±20%	DCR (mΩ) MAX	Isat <sup>2</sup> (Adc)
HAH73-0R1	0.10	0.08	2.5	30.0
HAH73-0R2	0.20	0.16	3.4	18.0
HAH73-R47	0.47	0.40	4.1	12.0
HAH73-R68	0.68	0.60	5.3	10.0
HAH73-1R0	1.00	0.90	10.0	8.5

1. Lo is the initial inductance.
2. Isat is the DC current which cause the inductance drop to Li.
3. Operating temperature : -20°C to 105°C ( including self-temperature rise ).



**DELTA ELECTRONICS, INC.**

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.

TEL: 886-3-3591968; FAX: 886-3-3591991

<http://www.deltaww.com>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>