

Dell Latitude 5310

Setup and Specification



Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.


Chapter 1: Set up your computer	5
Chapter 2: Create a USB recovery drive for Windows	7
Chapter 3: Chassis overview	8
Display view.....	8
Left view.....	8
Right view.....	8
Palmrest view.....	8
Bottom view.....	8
Chapter 4: Technical specifications	9
Dimensions and weight.....	9
Processors.....	10
Chipset.....	10
Operating system.....	10
Memory.....	10
Ports and connectors.....	11
Communications.....	12
Audio.....	12
Storage.....	13
Media-card reader.....	13
Keyboard.....	13
Camera.....	14
Touchpad.....	14
Touchpad gestures.....	15
Power adapter.....	15
Battery.....	15
Display.....	16
Fingerprint reader.....	17
Video.....	17
Computer environment.....	18
Sensor and control specifications.....	18
Security.....	18
Security Software.....	19
Chapter 5: Keyboard shortcuts	20
Chapter 6: Software	21
Downloading Windows drivers.....	21
Chapter 7: System setup	22
Boot menu.....	22
Navigation keys.....	22

Boot Sequence.....	23
System setup options.....	23
General options.....	23
System information.....	24
Video.....	26
Security.....	26
Secure boot.....	27
Intel Software Guard Extensions.....	28
Performance.....	28
Power management.....	29
POST behavior.....	30
Manageability.....	30
Virtualization support.....	30
Wireless.....	31
Maintenance screen.....	31
System logs.....	31
Updating the BIOS in Windows	32
Updating BIOS on systems with BitLocker enabled.....	32
Updating your system BIOS using a USB flash drive.....	32
System and setup password.....	33
Assigning a system setup password.....	33
Deleting or changing an existing system setup password.....	34
Chapter 8: Getting help.....	35
Contacting Dell.....	35

Set up your computer

1. Connect the power adapter and press the power button.

NOTE: To conserve battery power, the battery might enter power saving mode.

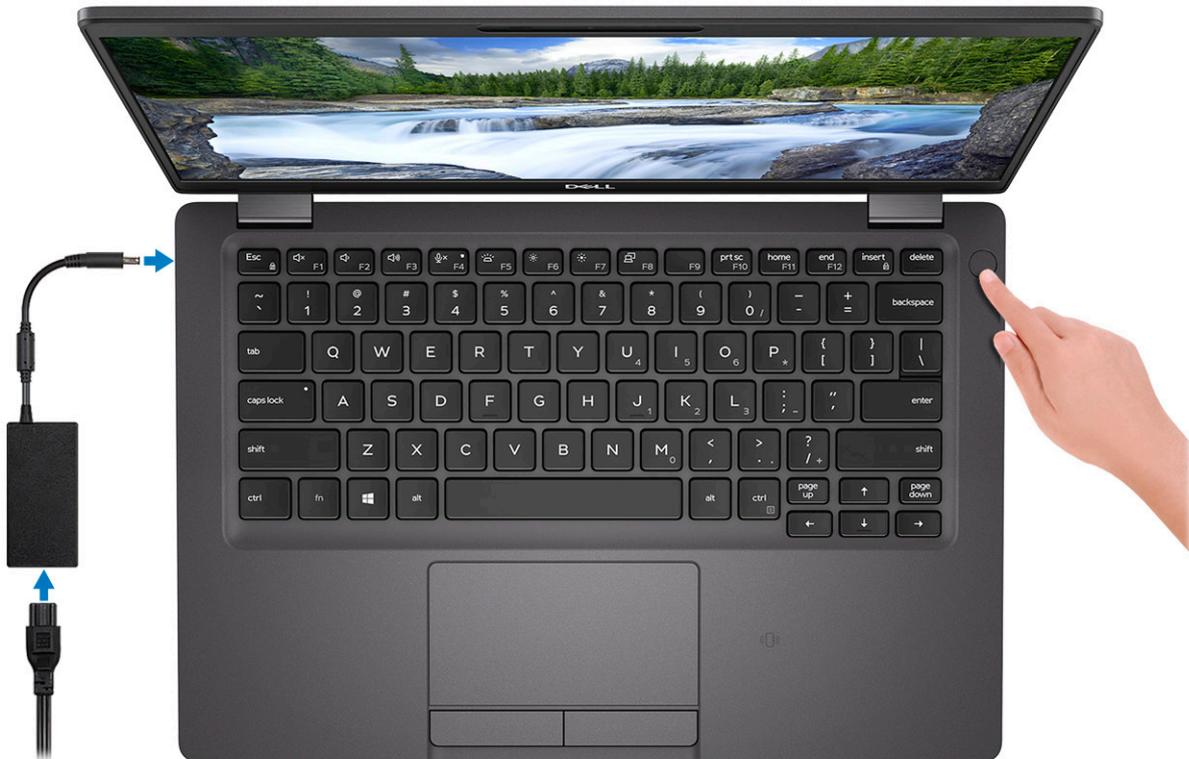

2. Finish Windows system setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.
 - NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended

Table 1. Locate Dell apps

Dell apps	Details
	<p>Dell Product Registration Register your computer with Dell.</p>

Table 1. Locate Dell apps (continued)

Dell apps	Details
	<p>Dell Help & Support Access help and support for your computer.</p>
	<p>SupportAssist Proactively checks the health of your computer’s hardware and software.</p> <p>NOTE: Renew or upgrade your warranty by clicking the warranty expiry date in SupportAssist.</p>
	<p>Dell Update Updates your computer with critical fixes and important device drivers as they become available.</p>
	<p>Dell Digital Delivery Download software applications including software that is purchased but not preinstalled on your computer.</p>

4. Create recovery drive for Windows.

NOTE: It is recommended to create a recovery drive to troubleshoot and fix problems that may occur with Windows.

For more information, see [Create a USB recovery drive for Windows](#).

Create a USB recovery drive for Windows

Create a recovery drive to troubleshoot and fix problems that may occur with Windows. An empty USB flash drive with a minimum capacity of 16 GB is required to create the recovery drive.

 **NOTE:** This process may take up to an hour to complete.

 **NOTE:** The following steps may vary depending on the version of Windows installed. Refer to the [Microsoft support site](#) for latest instructions.

1. Connect the USB flash drive to your computer.
2. In Windows search, type **Recovery**.
3. In the search results, click **Create a recovery drive**.
The **User Account Control** window is displayed.
4. Click **Yes** to continue.
The **Recovery Drive** window is displayed.
5. Select **Back up system files to the recovery drive** and click **Next**.
6. Select the **USB flash drive** and click **Next**.
A message appears, indicating that all data in the USB flash drive will be deleted.
7. Click **Create**.
8. Click **Finish**.
For more information about reinstalling Windows using the USB recovery drive, see the *Troubleshooting* section of your product's *Service Manual* at www.dell.com/support/manuals.

Chassis overview

Topics:

- [Display view](#)
- [Left view](#)
- [Right view](#)
- [Palmrest view](#)
- [Bottom view](#)

Display view

1. Array microphone
2. Camera shutter
3. Camera (Optional)
4. Camera status LED
5. Array microphone
6. LCD panel
7. Battery indicator LED

Left view

1. Power connector port
2. USB 3.2 Gen 2 (USB Type-C) port with DisplayPort/Thunderbolt (optional)
3. HDMI port
4. USB 3.2 Gen 1
5. Smart card reader (optional)

Right view

1. Universal Audio Jack
2. microSD card reader
3. micro-SIM card slot (Optional)
4. USB 3.2 Gen 1 port with PowerShare
5. Network port
6. Wedge-shaped lock slot

Palmrest view

1. Power button with optional fingerprint reader (FPR)
2. Keyboard
3. NFC/Contactless smart card reader (Optional)
4. Touchpad

Bottom view

1. Thermal vent
2. Service tag label
3. Speakers

Technical specifications

NOTE: Offerings may vary by region. The following specifications are only those required by law to ship with your computer. For more information about the configuration of your computer, go to Help and Support in your Windows operating system and select the option to view information about your computer.

Topics:

- [Dimensions and weight](#)
- [Processors](#)
- [Chipset](#)
- [Operating system](#)
- [Memory](#)
- [Ports and connectors](#)
- [Communications](#)
- [Audio](#)
- [Storage](#)
- [Media-card reader](#)
- [Keyboard](#)
- [Camera](#)
- [Touchpad](#)
- [Power adapter](#)
- [Battery](#)
- [Display](#)
- [Fingerprint reader](#)
- [Video](#)
- [Computer environment](#)
- [Sensor and control specifications](#)
- [Security](#)
- [Security Software](#)

Dimensions and weight

Table 2. Dimensions and weight

Description	Values
Height:	
Front	17.53 mm (0.69 in.)
Rear	19.72 mm (0.78 in.)
Width	305.70 mm (12.00 in.)
Depth	207.50 mm (8.17 in.)
Weight (maximum)	1.24 kg (2.73 lb)
	NOTE: The weight of your computer depends on the configuration ordered and the manufacturing variability.

Processors

Table 3. Processors

Description	Values				
Processors	10th Generation Intel Core i3-10110U processor	10th Generation Intel Core i5-10210U processor	10th Generation Intel Core i5-10310U processor	10th Generation Intel Core i7-10610U processor	10th Generation Intel Core i7-10810U processor
Wattage	15 W				
Core count	2	4	4	4	6
Thread count	4	8	8	8	12
Speed	2.1 GHz to 4.1 GHz	1.6 GHz to 4.2 GHz	1.7 GHz to 4.4 GHz	1.8 GHz to 4.9 GHz	1.1 GHz to 4.9 GHz
Cache	4 MB	6 MB	6 MB	8 MB	12 MB
Integrated graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics

Chipset

Table 4. Chipset

Description	Values
Chipset	Integrated in the processor
Processor	10th Generation Intel Core i3/i5/i7
DRAM bus width	64-bit
Flash ROM	<ul style="list-style-type: none">• 24 MB (Non-vPRO)• 32 MB (vPRO)
PCIe bus	Up to Gen3

Operating system

- Windows 10 Home (64-bit)
- Windows 10 Professional (64-bit)
- Ubuntu 18.04 LTS

Memory

Table 5. Memory specifications

Description	Values
Slots	Two SoDIMM slots

Table 5. Memory specifications (continued)

Description	Values
Type	DDR4
Speed	2667 MHz
Maximum memory	32 GB
Minimum memory	4 GB
Memory size per slot	4 GB, 8 GB, 16 GB
Configurations supported	<ul style="list-style-type: none"> • 4 GB, 1 x 4 GB, DDR4, 2667 MHz, SODIMM • 8 GB, 2 x 4 GB, DDR4, 2667 MHz, SODIMM • 8 GB, 1 x 8 GB, DDR4, 2667 MHz, SODIMM • 16 GB, 2 x 8 GB, DDR4, 2667 MHz, SODIMM • 16 GB, 1 x 16 GB, DDR4, 2667 MHz, SODIMM • 32 GB, 2 x 16 GB, DDR4, 2667 MHz, SODIMM

Ports and connectors

Table 6. External ports and connectors

Description	Values
External:	
Network	Flip-Down RJ45
USB	<ul style="list-style-type: none"> • One USB 3.2 Gen 1 Type-A port • One USB 3.2 Gen 1 Type-A port with PowerShare • One USB 3.2 Gen 2 Type C port with DisplayPort/Power Delivery Thunderbolt™3 (Optional)
Audio	One Universal Audio Jack
Video	HDMI 1.4 DP over USB Type-C
Media card reader	uSD slot
SIM card	uSIM card with tray (optional)
Smart card	Smart card reader slot (optional)
Docking port	Type-C docks
Power adapter port	7.4 mm barrel
Security	Wedge-shaped lock slot

Table 7. Internal ports and connectors

Description	Values
Internal:	
M.2	<ul style="list-style-type: none"> • One M.2 2280 slot for SATA/PCIe x 4

Table 7. Internal ports and connectors (continued)

Description	Values
	<ul style="list-style-type: none"> • One M.2 2230 WLAN/BT PCIe, CNVi, and USB 2.0 • One M.2 3042 WWAN PCIe, USB 3.0, and USB 2.0

Communications

Ethernet

Table 8. Ethernet specifications

Description	Values
Model number	<ul style="list-style-type: none"> • Intel I219 GB ethernet controller • Intel Ethernet Connection I219LM for vPro CPU configuration • Intel Ethernet Connection I219V for Transational CPU configuration
Transfer rate	10/100/1000 Mbps

Wireless module

Table 9. Wireless module specifications

Description	Values	
Model number	Intel AX201	Qualcomm QCA61x4A (DW1820)
Transfer rate	Up to 2400 Mbps	Up to 867 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none"> • WiFi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) • Wi-Fi 6 (WiFi 802.11ax) 	<ul style="list-style-type: none"> • Wi-Fi 802.11b/g/a/n/ac • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac)
Encryption	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP 	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP
Bluetooth	Bluetooth 5.1	Bluetooth 5.0

Audio

Table 10. Audio specifications

Description	Values
Controller	Realtek ALC3254
Stereo conversion	Supported

Table 10. Audio specifications (continued)

Description		Values
Internal interface		High-definition audio
External interface		Universal Audio Jack
Speakers		Two
Internal speaker amplifier		Supported (audio codec integrated)
External volume controls		Keyboard shortcut controls
Speaker output:		
	Average	2 W
	Peak	2.5 W
Subwoofer output		Not supported
Microphone		Dual-array microphones

Storage

Your computer supports the following configuration:

- One M.2 2230/2280 solid-state drive

Table 11. Storage specifications

Form factor	Interface type	Capacity
M.2 2230, Gen 3 PCIe NVMe, Class 35 SSD	Gen 3 PCIe x4 NVMe	128 GB, 256 GB, 512 GB
M.2 2280, Gen 3 PCIe NVMe, Class 40 SSD	Gen 3 PCIe x4 NVMe	256 GB, 512 GB, 1 TB
M.2 2280, Gen 3 PCIe NVMe, FDE SSD	Gen 3 PCIe x4 NVMe	256 GB, 512 GB

Media-card reader

Table 12. Media-card reader specifications

Description	Values
Type	One uSD card slot
Cards supported	uSD 4.0

Keyboard

Table 13. Keyboard specifications

Description	Values
Type	<ul style="list-style-type: none"> • Standard keyboard • Backlit keyboard

Table 13. Keyboard specifications (continued)

Description	Values
Layout	QWERTY
Number of keys	<ul style="list-style-type: none"> • United States and Canada: 81 keys • United Kingdom: 82 keys • Japan: 85 keys
Size	X=18.05 mm key pitch Y=18.05 mm key pitch
Shortcut keys	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.

Camera

Table 14. Camera specifications

Description	Values
Number of cameras	One
Type	HD resolution
Location	Front
Sensor type	CMOS sensor technology
Resolution:	
Still image	1280 x 720 megapixel
Video	HD resolution (1280 x 720) at 30 fps
Diagonal viewing angle	78.6 degrees

Touchpad

Table 15. Touchpad specifications

Description	Values
Resolution:	
Horizontal	1103
Vertical	615
Dimensions:	
Horizontal	91.90 mm (3.62 in.)
Vertical	51.40 mm (2.02 in.)

Touchpad gestures

For more information about touchpad gestures for Windows 10, see the Microsoft knowledge base article [4027871](https://support.microsoft.com/4027871) at support.microsoft.com.

Power adapter

Table 16. Power adapter specifications

Description	Value		
Type	E5 65W	E5 90W	E5 65W
Diameter (connector)	7.4 mm Barrel	7.4 mm Barrel	Type-C connector (Optional)
Input voltage	100 VAC to 240 VAC	100 VAC to 240 VAC	100 VAC to 240 VAC
Input frequency	50 Hz to 60 Hz	50 Hz to 60 Hz	50 Hz to 60 Hz
Input current (maximum)	1.5 A	1.6 A	1.7 A
Output current (continuous)	3.34 A	4.62 A	20 V/3.25 A(Continuous) 15 V/3 A (Continuous) 9.0 V/3 A (Continuous) 5.0 V/3 A(Continuous)
Rated output voltage	219.50 VDC	19.50 VDC	20 VDC/15 VDC/9 VDC/5 VDC
Temperature range:			
Operating	Charge:0°C to 40°C (32°F to 104°F)	Charge:0°C to 40°C (32°F to 104°F)	Charge:0°C to 40°C (32°F to 104°F)
Storage	Charge: -40°C to 70°C (-40°F to 158°F)	Charge: -40°C to 70°C (-40°F to 158°F)	Charge: -40°C to 70°C (-40°F to 158°F)

Battery

Table 17. Battery specifications

Description	Values		
Type	3-cell lithium-ion 42 WHr ExpressCharge	4-cell lithium-ion 60 WHr ExpressCharge	4-cell lithium-ion 60 WHr with Long Life Cycle
Voltage	11.40 VDC	7.60 VDC	7.60 VDC
Weight (maximum)	0.19 kg (0.42 lb)	0.27 kg (0.60 lb)	0.23 Kg (0.51 lb)
Dimensions:			
Height	95.90 mm (3.78 in.)	95.90 mm (3.78 in.)	95.90 mm (3.78 in.)
Width	200.50 mm (7.89 in.)	238 mm (9.37 in.)	238 mm (9.37 in.)
Depth	5.70 mm (0.22 in.)	5.70 mm (0.22 in.)	5.70 mm (0.22 in.)
Temperature range:			

Table 17. Battery specifications (continued)

Description		Values		
	Operating	Charge: 0°C to 45°C (32°F to 113°F); Discharge: 0°C~70°C(32°F to 113°F)	Charge: 0°C to 45°C (32°F to 113°F); Discharge: 0°C~70°C(32°F to 113°F)	Charge: 0°C to 45°C (32°F to 113°F); Discharge: 0°C~70°C(32°F to 113°F)
	Storage	-20°C to 65°C (4°F to 149°F)	-20°C to 65°C (4°F to 149°F)	-20°C to 65°C (4°F to 149°F)
Operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Charging time (approximate)		<ul style="list-style-type: none"> Standard charge: 0°C to 50°C: 4 hours Express Charge: 0°C to 15°C: 4 hours; 16°C to 45°C: 2 hours; 46°C to 50°C: 3 hours <p>i NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on https://www.dell.com/</p>	<ul style="list-style-type: none"> Standard charge: 0°C to 50°C: 4 hours Express Charge: 0°C to 15°C: 4 hours; 16°C to 45°C: 2 hours; 46°C to 50°C: 3 hours <p>i NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on https://www.dell.com/</p>	<ul style="list-style-type: none"> Standard charge: 0°C to 50°C: 3 hours Express Charge: 0°C to 15°C: 4 hours; 16°C to 45°C: 2 hours; 46°C to 50°C: 3 hours <p>LLC battery only supports the standard charge.</p> <p>i NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, https://www.dell.com/</p>
Life span (approximate)		300 discharge/charge cycles	300 discharge/charge cycles	1year/300 discharge/Charge 3 years/1000 discharge/Charge
Coin-cell battery		CR-2032	CR-2032	CR-2032
ExpressCharge		Supported	Supported	Supported

Display

Table 18. Display specifications

Description		Values
Type		<ul style="list-style-type: none"> 13.3-inch, HD, Narrow bent 13.3-inch, FHD, Narrow bent
Panel technology		HD: Twisted Nematic (TN), FHD: Wide Viewing Angle (WVA)
Luminance (typical)		<ul style="list-style-type: none"> 220 nits 300 nits
Dimensions (active area):		
	Height	165.24 mm (6.51 in.)

Table 18. Display specifications (continued)

Description		Values
	Width	293.76 mm (11.57 in.)
	Diagonal	337.04 mm (13.27 in.)
Native resolution		HD: 1366 x 768, FHD: 1920x1080
Megapixels		HD: 1.04M, FHD:2.07M
Color gamut		HD: 45% NTCS, FHD:72% NTSC
Pixels Per Inch (PPI)		HD: 118, FHD: 166
Contrast ratio (min)		HD: 300:1, FHD:600:1
Response time (max)		35 ms
Refresh rate		60 Hz
Horizontal view angle		HD: +/- 40 degrees, FHD: +/- 80 degrees
Vertical view angle		HD: +10 / -30 degrees, FHD:+/- 80 degrees
Pixel pitch		HD:0.215 mm, FHD:0.153 mm
Power consumption (maximum)		HD: 2.85 W, FHD:4.5 W
Anti-glare vs glossy finish		Anti-glare
Touch options		Integrated Touch (optional)

Fingerprint reader

Table 19. Fingerprint reader specifications

Description	Values
Sensor technology	Capacitive
Sensor resolution	500 dpi
Sensor area	5.25 mm x 6.9 mm
Sensor pixel size	108 x 88

Video

Table 20. Video specifications

Integrated graphics			
Controller	External display support	Memory size	Processor
Intel UHD Graphics	HDMI 1.4 / DP over USB Type-C	Share System Memory	CML-U

Computer environment

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 21. Computer environment

Description	Operating	Storage
Temperature range	0 °C to 35 °C (32 °F to 95 °F)	-40 °C to 65 °C (-40 °F to 149 °F)
Relative humidity (maximum)	10 % to 80 % (non-condensing)	0 % to 95 % (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	140 G†	160 G†
Altitude (maximum)	-15.2 m to 3048 m (4.64 ft to 5518.4 ft)	-15.2 m to 10668 m (4.64 ft to 19234.4 ft)

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

Sensor and control specifications

Table 22. Sensor and control specifications

Specifications
Hall Effect Sensor (Detects when the lid is closed)

Security

Table 23. Security

Feature	Specifications
Trusted Platform Module (TPM) 2.0	Integrated on the system board
Firmware TPM	Optional
Windows Hello Support	Yes, optional fingerprint on power button Optional IR camera
Cable lock	Noble lock
FIPS 140-2 certification for TPM	Yes
ControlVault 3 Advanced Authentication with FIPS 140-2 Level 3 Certification	Optional (FPR, SC and CSC/NFC)
Fingerprint Reader Only	Touch Fingerprint reader in power button tied to ControlVault 3
Contacted Smart Card and ControlVault 3	Optional (FIPS 201 Smart card reader certification/SIPR)

Security Software

Table 24. Security Software specifications

Specifications
Dell Client Command Suite
Optional Dell Data Security and Management Software
Dell Client Command Suite
Dell BIOS Verification
Optional Dell Endpoint Security and Management Software
VMware Carbon Black Endpoint Standard
VMware Carbon Black Endpoint Standard + Secureworks Threat Detection and Response
Dell Encryption Enterprise
Dell Encryption Personal
Carbonite
VMware Workspace ONE
Absolute® Endpoint Visibility and Control
Netskope
Dell Supply Chain Defense

Keyboard shortcuts

 **NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Table 25. List of keyboard shortcuts

Keys	Primary Behavior	Secondary Behavior (Fn + Key)
Fn + Esc	Escape	Toggle Fn-key lock
Fn + F1	Mute audio	F1 behavior
Fn + F2	Decrease volume	F2 behavior
Fn + F3	Increase volume	F3 behavior
Fn + F4	Mic Mute	F4 behavior
Fn + F5	Keyboard backlight  NOTE: Not applicable for non-backlight keyboard.	F5 behavior
Fn + F6	Decrease screen brightness	F6 behavior
Fn + F7	Increase screen brightness	F7 behavior
Fn + F8	Display Toggle (Win + P)	F8 behavior
Fn + F10	Print Screen	F10 behavior
Fn + F11	Home	F11 behavior
Fn + F12	End	F12 behavior
Fn + Right Ctrl	Emulates Right Click	--

Software

This chapter details the supported operating systems along with instructions on how to install the drivers.

Topics:

- [Downloading Windows drivers](#)

Downloading Windows drivers

1. Turn on the laptop.
2. Go to **Dell.com/support**.
3. Click **Product Support**, enter the Service Tag, and then click **Submit**.
 **NOTE:** If you do not have the Service Tag, use the auto detect feature or manually browse for your laptop model.
4. Click **Drivers and Downloads**.
5. Select the operating system installed on your laptop.
6. Scroll down the page and select the driver to install.
7. Click **Download File** to download the driver.
8. After the download is complete, navigate to the folder where you saved the driver file.
9. Double-click the driver file icon and follow the instructions on the screen.

System setup

CAUTION: Unless you are an expert computer user, do not change the settings in the BIOS Setup program. Certain changes can make your computer work incorrectly.

NOTE: Before you change BIOS Setup program, it is recommended that you write down the BIOS Setup program screen information for future reference.

Use the BIOS Setup program for the following purposes:

- Get information about the hardware installed in your computer, such as the amount of RAM and the size of the hard drive.
- Change the system configuration information.
- Set or change a user-selectable option, such as the user password, type of hard drive installed, and enabling or disabling base devices.

Topics:

- [Boot menu](#)
- [Navigation keys](#)
- [Boot Sequence](#)
- [System setup options](#)
- [Updating the BIOS in Windows](#)
- [System and setup password](#)

Boot menu

Press <F12> when the Dell logo appears to initiate a one-time boot menu with a list of the valid boot devices for the system. Diagnostics and BIOS Setup options are also included in this menu. The devices listed on the boot menu depend on the bootable devices in the system. This menu is useful when you are attempting to boot to a particular device or to bring up the diagnostics for the system. Using the boot menu does not make any changes to the boot order stored in the BIOS.

The options are:

- UEFI Boot:
 - Windows Boot Manager
- Other Options:
 - BIOS Setup
 - BIOS Flash Update
 - Diagnostics
 - Change Boot Mode Settings

Navigation keys

NOTE: For most of the System Setup options, changes that you make are recorded but do not take effect until you restart the system.

Keys	Navigation
Up arrow	Moves to the previous field.
Down arrow	Moves to the next field.
Enter	Selects a value in the selected field (if applicable) or follow the link in the field.
Spacebar	Expands or collapses a drop-down list, if applicable.

Keys	Navigation
Tab	Moves to the next focus area.
Esc	Moves to the previous page until you view the main screen. Pressing Esc in the main screen displays a message that prompts you to save any unsaved changes and restarts the system.

Boot Sequence

Boot sequence enables you to bypass the System Setup–defined boot device order and boot directly to a specific device (for example: optical drive or hard drive). During the Power-on Self-Test (POST), when the Dell logo appears, you can:

- Access System Setup by pressing F2 key
- Bring up the one-time boot menu by pressing F12 key.

The one-time boot menu displays the devices that you can boot from including the diagnostic option. The boot menu options are:

- Removable Drive (if available)
- STXXXX Drive
 - **NOTE:** XXXX denotes the SATA drive number.
- Optical Drive (if available)
- SATA Hard Drive (if available)
- Diagnostics
 - **NOTE:** Choosing **Diagnostics**, displays the **ePSA diagnostics** screen.

The boot sequence screen also displays the option to access the System Setup screen.

System setup options

NOTE: Depending on the and its installed devices, the items listed in this section may or may not appear.

General options

Table 26. General

Option	Description
System Information	Displays the following information: <ul style="list-style-type: none"> • System Information: Displays BIOS Version, Service Tag, Asset Tag, Ownership Tag, Manufacture Date, Ownership Date, and the Express Service Code. • Memory Information: Displays Memory Installed, Memory Available, Memory Speed, Memory Channel Mode, Memory Technology, DIMM A size, and DIMM B size • Processor Information: Displays Processor Type, Core Count, Processor ID, Current Clock Speed, Minimum Clock Speed, Maximum Clock Speed, Processor L2 Cache, Processor L3 Cache, HT Capable, and 64-Bit Technology. • Device Information: Displays Primary HDD, M.2 PCIe SSD-0, LOM MAC Address, Video Controller, Video BIOS Version, Video Memory, Panel type, Native Resolution, Audio Controller, Wi-Fi Device, and Bluetooth Device.
Battery Information	Displays the battery status health and whether the AC adapter is installed.
Boot Sequence	Allows you to specify the order in which the computer attempts to find an operating system from the devices specified in this list.
UEFI Boot Path Security	This option controls whether or not the system will prompt the user to enter the Admin password when booting a UEFI boot path from the F12 Boot Menu. <ul style="list-style-type: none"> • Always, Except Internal HDD—Default • Always, Except Internal HDD&PXE

Table 26. General (continued)

Option	Description
	<ul style="list-style-type: none"> • Always • Never
Date/Time	Allows you to set the date and time settings. Changes to the system date and time take effect immediately.

System information

Table 27. System Configuration

Option	Description
Integrated NIC	<p>Allows you to configure the on-board LAN controller.</p> <ul style="list-style-type: none"> • Disabled = The internal LAN is off and not visible to the operating system. • Enabled = The internal LAN is enabled. • Enabled w/PXE = The internal LAN is enabled (with PXE boot) (selected by default)
SATA Operation	<p>Allows you to configure the operating mode of the integrated hard drive controller.</p> <ul style="list-style-type: none"> • Disabled = The SATA controllers are hidden • AHCI = SATA is configured for AHCI mode • RAID ON = SATA is configured to support RAID mode (selected by default)
Drives	<p>Allows you to enable or disable the various drives on-board:</p> <ul style="list-style-type: none"> • SATA-2 (enabled by default) • M.2 PCIe SSD-0 (enabled by default)
Smart Reporting	This field controls whether hard drive errors for integrated drives are reported during system startup. The Enable Smart Reporting option is disabled by default.
USB Configuration	<p>Allows you to enable or disable the integrated USB controller for:</p> <ul style="list-style-type: none"> • Enable USB Boot Support • Enable External USB Port <p>All the options are enabled by default.</p>
Thunderbolt Adapter Configuration	<p>This section allows Thunderbolt Adapter Configuration.</p> <ul style="list-style-type: none"> • Thunderbolt-is enabled by default • Enable Thunderbolt Boot Support-is disabled • No security-is disabled • User configuration-enabled by default • Secure connect-is disabled • Display port and USB Only-is disabled
USB PowerShare	<p>This option configures the USB PowerShare feature behavior.</p> <ul style="list-style-type: none"> • Enable USB PowerShare - disabled by default <p>This feature is intended to allow users to power or charge external devices, such as phones and portable music players, using the stored system battery power through the USB PowerShare port on the notebook, while the notebook is in a sleep state.</p>
Audio	<p>Allows you to enable or disable the integrated audio controller. The option Enable Audio is selected by default.</p> <ul style="list-style-type: none"> • Enable Microphone • Enable Internal Speaker <p>Both the options are selected by default.</p>

Table 27. System Configuration (continued)

Option	Description
Keyboard Illumination	<p>This field lets you choose the operating mode of the keyboard illumination feature. The keyboard brightness level can be set from 0% to 100%. The options are:</p> <ul style="list-style-type: none"> ● Disabled ● Dim ● Bright-enabled by default
Keyboard Backlight Timeout on AC	<p>The Keyboard Backlight Timeout dims out with AC option. The main keyboard illumination feature is not affected. Keyboard Illumination will continue to support the various illumination levels. This field has an effect when the backlight is enabled. The options are:</p> <ul style="list-style-type: none"> ● 5 sec ● 10 sec-enabled by default ● 15 sec ● 30 sec ● 1 min ● 5 min ● 15 min ● Never
Keyboard Backlight Timeout on Battery	<p>The Keyboard Backlight Timeout dims out with the Battery option. The main keyboard illumination feature is not affected. Keyboard Illumination will continue to support the various illumination levels. This field has an effect when the backlight is enabled. The options are:</p> <ul style="list-style-type: none"> ● 5 sec ● 10 sec-enabled by default ● 15 sec ● 30 sec ● 1 min ● 5 min ● 15 min ● Never
Unobtrusive Mode	<ul style="list-style-type: none"> ● Enable Unobtrusive Mode (disabled by default) <p>When enabled pressing Fn+Shift+B will turn off all light and sound emissions in the system. Press Fn+Shift+B to resume normal operation.</p>
Miscellaneous Devices	<p>Allows you to enable or disable the following devices:</p> <ul style="list-style-type: none"> ● Enable Camera (enabled by default) ● Enable Hard Drive Free Fall Protection(enabled by default) ● Enable Secure Digital (SD) Card (enabled by default) ● Secure Digital (SD) Card Boot ● Secure Digital (SD) Card Read-Only Mode
MAC Address Pass-Through	<ul style="list-style-type: none"> ● System Unique MAC Address (disabled by default) ● Integrated NIC 1 MAC Address ● Disabled <p>The feature replaces the external NIC MAC address (in a supported dock or dongle) with the selected MAC address from the system. The default option is to use the Passthrough MAC address.</p>

Video

Option Description

LCD Brightness Allows you to set the display brightness depending up on the power source—On Battery and On AC. The LCD brightness is independent for battery and AC adapter. It can be set using the slider.

 **NOTE:** The video setting is visible only when a video card is installed into the system.

Security

Table 28. Security

Option	Description
Admin Password	Allows you to set, change, and delete the admin password.
System Password	Allows you to set, change, and delete the system password.
Internal HDD-2 Password	This option lets you set, change, or delete the password on the system's internal hard disk drive (HDD).
Strong Password	This option lets you enable or disable strong passwords for the system.
Password Configuration	Allows you to control the minimum and maximum number of characters allowed for a administrative password and the system password. The range of characters is between 4 and 32.
Password Bypass	<p>This option lets you bypass the System (Boot) Password and the internal HDD password prompts during a system restart.</p> <ul style="list-style-type: none"> Disabled — Always prompt for the system and internal HDD password when they are set. This option is enabled by default. Reboot Bypass — Bypass the password prompts on Restarts (warm boots). <p> NOTE: The system will always prompt for the system and internal HDD passwords when powered on from the off state (a cold boot). Also, the system will always prompt for passwords on any module bay HDDs that may be present.</p>
Password Change	<p>This option lets you determine whether changes to the System and Hard Disk passwords are permitted when an administrator password is set.</p> <p>Allow Non-Admin Password Changes - This option is enabled by default.</p>
UEFI Capsule Firmware Updates	This option controls whether this system allows BIOS updates via UEFI capsule update packages. This option is selected by default. Disabling this option will block BIOS updates from services such as Microsoft Windows Update and Linux Vendor Firmware Service (LVFS)
TPM 2.0 Security	<p>Allows you to control whether the Trusted Platform Module (TPM) is visible to the operating system.</p> <ul style="list-style-type: none"> TPM On (default) Clear PPI Bypass for Enable Commands PPI Bypass for Disable Commands PPI Bypass for Clear Commands Attestation Enable (default) Key Storage Enable (default) SHA-256 (default) <p>Choose any one option:</p> <ul style="list-style-type: none"> Disabled Enabled (default)

Table 28. Security (continued)

Option	Description
Absolute	This field lets you Enable, Disable or Permanently Disable the BIOS module interface of the optional Absolute Persistence Module service from Absolute Software. <ul style="list-style-type: none"> • Enabled - This option is selected by default. • Disabled • Permanently Disabled
OROM Keyboard Access	This option determines whether users are able to enter Option ROM configuration screen via hotkeys during boot. <ul style="list-style-type: none"> • Enabled (default) • Disabled • One Time Enable
Admin Setup Lockout	Allows you to prevent users from entering Setup when Admin password is set. This option is not set by default.
Master Password Lockout	Allows you to disable master password support Hard Disk passwords need to be cleared before the settings can be changed. This option is not set by default.
SMM Security Mitigation	Allows you to enable or disable additional UEFI SMM Security Mitigation protections. This option is not set by default.

Secure boot

Table 29. Secure Boot

Option	Description
Secure Boot Enable	Allows you to enable or disable Secure Boot feature <ul style="list-style-type: none"> • Secure Boot Enable Option is not selected.
Secure Boot Mode	Allows you to modify the behavior of Secure Boot to allow evaluation or enforcement of UEFI driver signatures. <ul style="list-style-type: none"> • Deployed Mode (default) • Audit Mode
Expert key Management	Allows you to manipulate the security key databases only if the system is in Custom Mode. The Enable Custom Mode option is disabled by default. The options are: <ul style="list-style-type: none"> • PK (default) • KEK • db • dbx If you enable the Custom Mode , the relevant options for PK, KEK, db, and dbx appear. The options are: <ul style="list-style-type: none"> • Save to File- Saves the key to a user-selected file • Replace from File- Replaces the current key with a key from a user-selected file • Append from File- Adds a key to the current database from a user-selected file • Delete- Deletes the selected key • Reset All Keys- Resets to default setting • Delete All Keys- Deletes all the keys <i>i</i> NOTE: If you disable the Custom Mode, all the changes made will be erased and the keys will restore to default settings.

Intel Software Guard Extensions

Table 30. Intel Software Guard Extensions

Option	Description
Intel SGX Enable	<p>This field specifies you to provide a secured environment for running code/storing sensitive information in the context of the main OS.</p> <p>Click one of the following options:</p> <ul style="list-style-type: none"> ● Disabled ● Enabled ● Software controlled—Default
Enclave Memory Size	<p>This option sets SGX Enclave Reserve Memory Size</p> <p>Click one of the following options:</p> <ul style="list-style-type: none"> ● 32 MB ● 64 MB ● 128 MB—Default

Performance

Table 31. Performance

Option	Description
Multi Core Support	<p>This field specifies whether the process has one or all cores enabled. The performance of some applications improves with the additional cores.</p> <ul style="list-style-type: none"> ● All—Default ● 1 ● 2 ● 3
Intel SpeedStep	<p>Allows you to enable or disable the Intel SpeedStep mode of processor.</p> <ul style="list-style-type: none"> ● Enable Intel SpeedStep <p>This option is set by default.</p>
C-States Control	<p>Allows you to enable or disable the additional processor sleep states.</p> <ul style="list-style-type: none"> ● C states <p>This option is set by default.</p>
Intel TurboBoost	<p>Allows you to enable or disable the Intel TurboBoost mode of the processor.</p> <ul style="list-style-type: none"> ● Enable Intel TurboBoost <p>This option is set by default.</p>
Hyper-Thread Control	<p>Allows you to enable or disable the HyperThreading in the processor.</p> <ul style="list-style-type: none"> ● Disabled ● Enabled—Default

Power management

Option	Description
AC Behavior	<p>Allows you to enable or disable the computer from turning on automatically when an AC adapter is connected.</p> <p>Default setting: Wake on AC is not selected.</p>
Enable Intel Speed Shift Technology	<ul style="list-style-type: none">• Enable Intel Speed Shift Technology <p>Default setting: Enabled</p>
Auto On Time	<p>Allows you to set the time at which the computer must turn on automatically. The options are:</p> <ul style="list-style-type: none">• Disabled• Every Day• Weekdays• Select Days <p>Default setting: Disabled</p>
USB Wake Support	<p>Allows you to enable USB devices to wake the system from Standby.</p> <p> NOTE: This feature is only functional when the AC power adapter is connected. If the AC power adapter is removed during Standby, the system setup removes power from all the USB ports to conserve battery power.</p> <ul style="list-style-type: none">• Enable USB Wake Support
Wireless Radio Control	<p>If Enabled, this feature will sense the connection of the system to a wired network and subsequently disable the selected wireless radios (WLAN and/ or WWAN).</p> <ul style="list-style-type: none">• Control WLAN radio - is disabled
Wake on LAN	<p>Allows you to enable or disable the feature that powers on the computer from the Off state when triggered by a LAN signal.</p> <ul style="list-style-type: none">• Disabled• LAN Only• LAN with PXE Boot <p>Default setting: Disabled</p>
Block Sleep	<p>This option lets you to block entering to sleep in OS environment. When enabled system won't go to sleep.</p> <p>Block Sleep - is disabled</p>
Peak Shift	<p>This option enables you to minimize the AC power consumption during the peak power times of day. After you enable this option, your system runs only in battery even if the AC is attached.</p> <ul style="list-style-type: none">• Enable peak shift—is disabled• Set battery threshold (15% to 100%) - 15 % (enabled by default)
Advanced Battery Charge Configuration	<p>This option enables you to maximize the battery health. By enabling this option, your system uses the standard charging algorithm and other techniques, during the non work hours to improve the battery health.</p> <p>Enable Advanced Battery Charge Mode- is disabled</p>
Primary Battery Charge Configuration	<p>Allows you to select the charging mode for the battery. The options are:</p> <ul style="list-style-type: none">• Adaptive—enabled by default• Standard—Fully charges your battery at a standard rate.• ExpressCharge—The battery charges over a shorter time using Dell's fast charging technology.• Primarily AC use• Custom <p>If Custom Charge is selected, you can also configure Custom Charge Start and Custom Charge Stop.</p> <p> NOTE: All charging mode may not be available for all the batteries. To enable this option, disable the Advanced Battery Charge Configuration option.</p>

POST behavior

Option	Description
Adapter Warnings	<p>Allows you to enable or disable the system setup (BIOS) warning messages when you use certain power adapters.</p> <p>Default setting: Enable Adapter Warnings</p>
Numlock Enable	<p>Allows you to enable the Numlock option when the computer boots.</p> <p>Enable Network. This option is enabled by default.</p>
Fn Lock Options	<p>Allows you to let hot key combinations Fn + Esc toggle the primary behavior of F1–F12, between their standard and secondary functions. If you disable this option, you cannot toggle dynamically the primary behavior of these keys. The available options are:</p> <ul style="list-style-type: none">• Fn Lock—enabled by default• Lock Mode Disable/Standard—enabled by default• Lock Mode Enable/Secondary
Fastboot	<p>Allows you to speed up the boot process by bypassing some of the compatibility steps. The options are:</p> <ul style="list-style-type: none">• Minimal• Thorough—enabled by default• Auto
Extended BIOS POST Time	<p>Allows you to create an extra preboot delay. The options are:</p> <ul style="list-style-type: none">• 0 seconds—enabled by default.• 5 seconds• 10 seconds
Full Screen Log	<ul style="list-style-type: none">• Enable Full Screen Logo—not enabled
Warnings and errors	<ul style="list-style-type: none">• Prompt on warnings and errors—enabled by default• Continue on warnings• Continue on warnings and errors

Manageability

Option	Description
Intel AMT Capability	<p>Allows you to provision AMT and MEBx Hotkey function is enabled, during the system boot.</p> <ul style="list-style-type: none">• Disabled• Enabled - by default• Restrict MEBx Access
USB Provision	<p>When enabled Intel AMT can be provisioned using the local provisioning file via a USB storage device.</p> <ul style="list-style-type: none">• Enable USB Provision - disabled by default
MEBx Hotkey	<p>Allows you to specify whether the MEBx Hotkey function should enable, during the system boot.</p> <ul style="list-style-type: none">• Enable MEBx hotkey—enabled by default

Virtualization support

Option	Description
Virtualization	<p>This field specifies whether a virtual Machine Monitor (VMM) can utilize the conditional hardware capabilities provided by Intel Virtualization Technology.</p> <p>Enable Intel Virtualization Technology—enabled by default.</p>
VT for Direct I/O	<p>Enables or disables the Virtual Machine Monitor (VMM) from utilizing the additional hardware capabilities provided by Intel® Virtualization technology for direct I/O.</p>

Option	Description
	Enable VT for Direct I/O - enabled by default.
Trusted Execution	This option specifies whether a Measured Virtual Machine Monitor (MVMM) can utilize the additional hardware capabilities provided by Intel Trusted Execution Technology. The TPM Virtualization Technology, and the Virtualization technology for direct I/O must be enabled to use this feature. Trusted Execution - disabled by default.

Wireless

Option	Description
Wireless Device Enable	Allows you to enable or disable the internal wireless devices. <ul style="list-style-type: none"> WLAN Bluetooth All the options are enabled by default.

Maintenance screen

Option	Description
Service Tag	Displays the Service Tag of your computer.
Asset Tag	Allows you to create a system asset tag if an asset tag is not already set. This option is not set by default.
BIOS Downgrade	This controls flashing of the system firmware to previous revisions. Option 'Allow BIOS downgrade' is enabled by default.
Data Wipe	This field allows users to erase the data securely from all internal storage devices. Option 'Wipe on Next boot' is not enabled by default. The following is list of devices affected: <ul style="list-style-type: none"> Internal SATA HDD/SSD Internal M.2 SATA SDD Internal M.2 PCIe SSD Internal eMMC
BIOS Recovery	This field allows you to recover from certain corrupted BIOS conditions from a recover file on the user primary hard drive or an external USB key. <ul style="list-style-type: none"> BIOS Recovery from Hard Drive—enabled by default Always perform integrity check—disabled by default
First Power On Date	This option lets you set Ownership date. <ul style="list-style-type: none"> Set Ownership Date—disabled by default

System logs

Option	Description
BIOS Events	Allows you to view and clear the System Setup (BIOS) POST events.
Thermal Events	Allows you to view and clear the System Setup (Thermal) events.
Power Events	Allows you to view and clear the System Setup (Power) events.

Updating the BIOS in Windows

It is recommended to update your BIOS (System Setup) when you replace the system board or if an update is available.

 **NOTE:** If BitLocker is enabled, it must be suspended prior to updating the system BIOS, and then re-enabled after the BIOS update is completed.

1. Restart the computer.
2. Go to **Dell.com/support**.
 - Enter the **Service Tag** or **Express Service Code** and click **Submit**.
 - Click **Detect Product** and follow the instructions on screen.
3. If you are unable to detect or find the Service Tag, click **Choose from all products**.
4. Choose the **Products** category from the list.

 **NOTE:** Choose the appropriate category to reach the product page.

5. Select your computer model and the **Product Support** page of your computer appears.
6. Click **Get drivers** and click **Drivers and Downloads**.
The Drivers and Downloads section opens.
7. Click **Find it myself**.
8. Click **BIOS** to view the BIOS versions.
9. Identify the latest BIOS file and click **Download**.
10. Select your preferred download method in the **Please select your download method below** window, click **Download File**.
The **File Download** window appears.
11. Click **Save** to save the file on your computer.
12. Click **Run** to install the updated BIOS settings on your computer.
Follow the instructions on the screen.

Updating BIOS on systems with BitLocker enabled

 **CAUTION:** If BitLocker is not suspended before updating the BIOS, the next time you reboot the system it will not recognize the BitLocker key. You will then be prompted to enter the recovery key to progress and the system will ask for this on each reboot. If the recovery key is not known, this can result in data loss or an unnecessary operating system reinstall. For more information about this subject, see Knowledge Article: [Updating the BIOS on Dell Systems With BitLocker Enabled](#)

Updating your system BIOS using a USB flash drive

If the system cannot load into Windows, but there is still a need to update the BIOS, download the BIOS file using another system and save it to a bootable USB Flash Drive.

 **NOTE:** You will need to use a bootable USB flash drive. Please refer to the following article for further details [How to Create a Bootable USB Flash Drive using Dell Diagnostic Deployment Package \(DDDP\)](#)

1. Download the BIOS update .EXE file to another system.
2. Copy the file e.g. O9010A12.EXE onto the bootable USB flash drive.
3. Insert the USB flash drive into the system that requires the BIOS update.
4. Restart the system and press F12 when the Dell splash logo appears to display the One Time Boot Menu.
5. Using arrow keys, select **USB Storage Device** and click **Enter**.
6. The system will boot to a Diag C:\> prompt.
7. Run the file by typing the full filename, for example, O9010A12.exe and press **Enter**.
8. The BIOS Update Utility will load. Follow the instructions on screen.



Figure 1. DOS BIOS Update Screen

System and setup password

Table 32. System and setup password

Password type	Description
System password	Password that you must enter to log on to your system.
Setup password	Password that you must enter to access and make changes to the BIOS settings of your computer.

You can create a system password and a setup password to secure your computer.

CAUTION: The password features provide a basic level of security for the data on your computer.

CAUTION: Anyone can access the data stored on your computer if it is not locked and left unattended.

NOTE: System and setup password feature is disabled.

Assigning a system setup password

You can assign a new **System or Admin Password** only when the status is in **Not Set**.

To enter the system setup, press F2 immediately after a power-on or reboot.

- In the **System BIOS** or **System Setup** screen, select **Security** and press **Enter**.
The **Security** screen is displayed.
- Select **System/Admin Password** and create a password in the **Enter the new password** field.
Use the following guidelines to assign the system password:
 - A password can have up to 32 characters.
 - The password can contain the numbers 0 through 9.
 - Only the following special characters are allowed: space, ("), (+), (.), (-), (.), (/), (:), ([), (\), (]), (`).
- Type the system password that you entered earlier in the **Confirm new password** field and click **OK**.
- Press **Esc** and a message prompts you to save the changes.
- Press **Y** to save the changes.
The computer reboots.

Deleting or changing an existing system setup password

Ensure that the **Password Status** is Unlocked (in the System Setup) before attempting to delete or change the existing System and Setup password. You cannot delete or change an existing System or Setup password, if the **Password Status** is Locked.

To enter the System Setup, press **F2** immediately after a power-on or reboot.

1. In the **System BIOS** or **System Setup** screen, select **System Security** and press **Enter**.
The **System Security** screen is displayed.
2. In the **System Security** screen, verify that **Password Status** is **Unlocked**.
3. Select **System Password**, alter or delete the existing system password and press **Enter** or **Tab**.
4. Select **Setup Password**, alter or delete the existing setup password and press **Enter** or **Tab**.

 **NOTE:** If you change the System and/or Setup password, re enter the new password when prompted. If you delete the System and Setup password, confirm the deletion when prompted.

5. Press **Esc** and a message prompts you to save the changes.
6. Press **Y** to save the changes and exit from System Setup.
The computer restarts.

Getting help

Topics:

- [Contacting Dell](#)

Contacting Dell

 **NOTE:** If you do not have an active Internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.

Dell provides several online and telephone-based support and service options. Availability varies by country and product, and some services may not be available in your area. To contact Dell for sales, technical support, or customer service issues:

1. Go to **Dell.com/support**.
2. Select your support category.
3. Verify your country or region in the **Choose a Country/Region** drop-down list at the bottom of the page.
4. Select the appropriate service or support link based on your need.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>