

# Vostro 3501

## Setup and specifications guide




## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

# Contents

<b>Chapter 1: Set up your computer</b> .....	<b>5</b>
<b>Chapter 2: Create a USB recovery drive for Windows</b> .....	<b>7</b>
<b>Chapter 3: Chassis overview</b> .....	<b>8</b>
Display view.....	8
Left view.....	9
Right view.....	9
Palmrest view.....	10
Bottom view.....	11
Keyboard shortcuts.....	11
<b>Chapter 4: Technical specifications</b> .....	<b>13</b>
Processors.....	13
Chipset.....	13
Operating system.....	13
Memory.....	14
Storage.....	14
Ports and connectors.....	14
Audio.....	15
Video.....	16
Camera.....	16
Communications.....	16
Keyboard.....	17
Touchpad.....	18
Media-card reader.....	18
Power adapter.....	18
Battery.....	19
Dimensions and weight.....	19
Display.....	20
Fingerprint reader.....	21
Security.....	21
Security Software.....	21
Computer environment.....	22
<b>Chapter 5: Getting help and contacting Dell</b> .....	<b>23</b>

# Set up your computer

## Steps

1. Connect the power adapter and press the power button.

**NOTE:** To conserve battery power, the battery might enter power saving mode.



**NOTE:** To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish operating system setup.

### For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, see the knowledge base articles [SLN151664](#) and [SLN151748](#) at [www.dell.com/support](http://www.dell.com/support).

### For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:







- Connect to a network for Windows updates.

**NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

**Table 1. Locate Dell apps**

Resources	Description
	<p><b>Dell Product Registration</b> Register your computer with Dell.</p>
	<p><b>Dell Help &amp; Support</b> Access help and support for your computer.</p>
	<p><b>My Dell</b> Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.</p>
	<p><b>SupportAssist</b> SupportAssist is the smart technology that keeps your computer running at its best by optimizing settings, detecting issues, removing viruses and notifies when you need to make system updates. SupportAssist proactively checks the health of your system's hardware and software. When an issue is detected, the necessary system state information is sent to Dell to begin troubleshooting. SupportAssist is preinstalled on most of the Dell devices running Windows operating system. For more information, see SupportAssist for Home PCs User's Guide on <a href="http://www.dell.com/serviceabilitytools">www.dell.com/serviceabilitytools</a>.</p> <p><b>NOTE:</b> In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p><b>Dell Update</b> Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article <a href="http://www.dell.com/support">000149088</a> at <a href="http://www.dell.com/support">www.dell.com/support</a>.</p>
	<p><b>Dell Digital Delivery</b> Download software applications, which are purchased but not pre-installed on your computer. For more information about using Dell Digital Delivery, see the knowledge base article <a href="http://www.dell.com/support">000129837</a> at <a href="http://www.dell.com/support">www.dell.com/support</a>.</p>

# Create a USB recovery drive for Windows

Create a recovery drive to troubleshoot and fix problems that may occur with Windows. An empty USB flash drive with a minimum capacity of 16 GB is required to create the recovery drive.

## Prerequisites

**NOTE:** This process may take up to an hour to complete.


**NOTE:** The following steps may vary depending on the version of Windows installed. Refer to the [Microsoft support site](#) for latest instructions.

## Steps

1. Connect the USB flash drive to your computer.
2. In Windows search, type **Recovery**.
3. In the search results, click **Create a recovery drive**.  
The **User Account Control** window is displayed.
4. Click **Yes** to continue.  
The **Recovery Drive** window is displayed.
5. Select **Back up system files to the recovery drive** and click **Next**.
6. Select the **USB flash drive** and click **Next**.  
A message appears, indicating that all data in the USB flash drive will be deleted.
7. Click **Create**.
8. Click **Finish**.  
For more information about reinstalling Windows using the USB recovery drive, see the *Troubleshooting* section of your product's *Service Manual* at [www.dell.com/support/manuals](http://www.dell.com/support/manuals).

## Chassis overview


### Display view

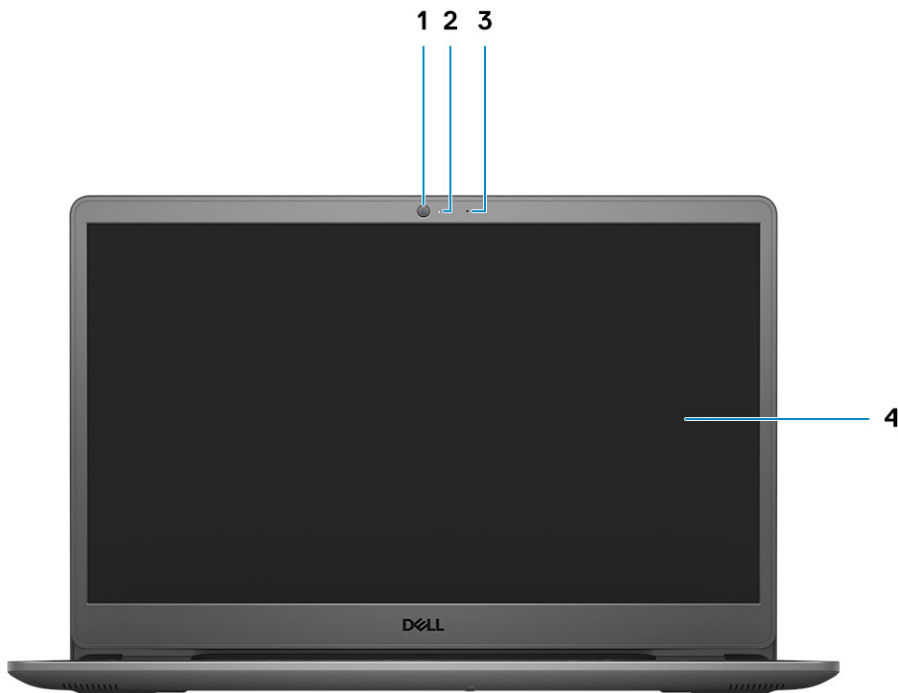


1. Camera
2. Camera Status Light
3. Microphones
4. LCD Panel




## Left view

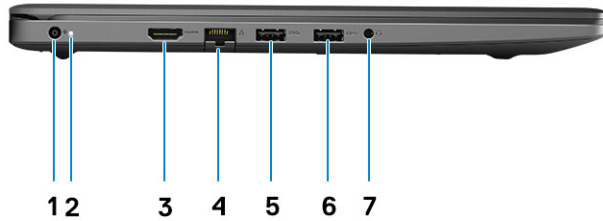


1. DC-in port
2. LED indicator
3. HDMI 1.4 port
-  **NOTE:** The maximum resolution supported by HDMI port is 1920x1080 @60Hz (24 bit)
4. Network Port
5. USB 3.2 Gen 1 port
6. USB 3.2 Gen 1 port
7. Universal audio jack (Realtek audio) / Audio jack (Cirrus audio logic)

## Right view

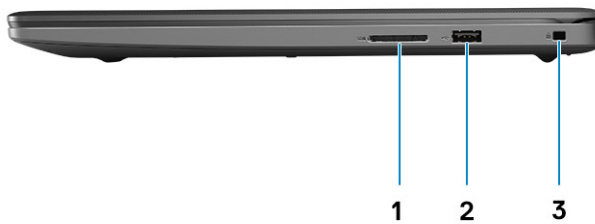

1. SD 3.0 card reader slot
2. USB 2.0 Type-A port
3. Wedge-shaped security slot

# Palmrest view

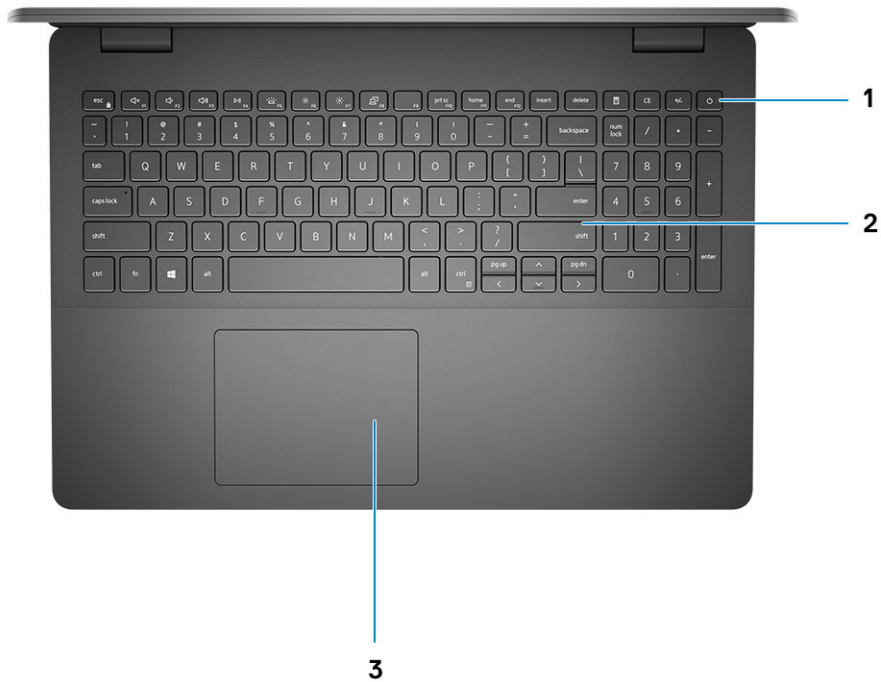

1. Power button with optional finger print reader
2. Keyboard
3. Touchpad

## Bottom view



1. Speakers
2. Service Tag
3. Air Vents

## Keyboard shortcuts

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

**Table 2. List of keyboard shortcuts**

Keys	Primary behavior
Fn + F1	Mute audio
Fn + F2	Decrease volume
Fn + F3	Increase volume
Fn + F4	Play/Pause
Fn + F5	Turn on/off keyboard backlight
Fn + F6	Decrease brightness

**Table 2. List of keyboard shortcuts (continued)**

<b>Keys</b>	<b>Primary behavior</b>
Fn + F7	Increase brightness
Fn + F8	Switch to external display
Fn + F10	Print screen
Fn + F11	Home
Fn + 12	End
Fn + Ctrl	Open application menu

# Technical specifications

**NOTE:** Offerings may vary by region. The following specifications are only those required by law to ship with your computer. For more information about the configuration of your computer, go to Help and Support in your Windows operating system and select the option to view information about your computer.

## Processors

**Table 3. Processors**

Description	Values
Processors	10th Generation Intel Core i3-1005G1
Wattage	15 W
Core count	2
Thread count	4
Speed	Up to 3.4 GHz
Cache	4 MB
Integrated graphics	Intel UHD Graphics

## Chipset

**Table 4. Chipset**

Description	Values
Processor	Ice lake U (ICL U) PCH-LP
Chipset	Intel Core i3
DRAM bus width	64-bit
PCIe bus	Gen 3

## Operating system

Your Vostro 3501 supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Home National Academic, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit
- Ubuntu 20.04 LTS, 64-bit

# Memory

**Table 5. Memory specifications**

Description	Values
Slots	Two SODIMM slots
Type	DDR4
Speed	2666 MHz
Maximum memory	16 GB
Minimum memory	4 GB
Configurations supported	<ul style="list-style-type: none"><li>• 4 GB DDR4 at 2666 MHz (1x4 GB)</li><li>• 8 GB DDR4 at 2666 MHz (2 x 4 GB)</li><li>• 8 GB DDR4 at 2666 MHz (1 x 8 GB)</li><li>• 12 GB DDR4 at 2666 MHz (1 x 8 GB + 1 x 4 GB)</li><li>• 16 GB DDR4 at 2666 MHz (1 x 16 GB)</li><li>• 16 GB DDR4 at 2666 MHz (2 x 8 GB)</li></ul>

# Storage

Your computer supports one of the following configurations:

- 2.5 in. 5400 RPM, SATA hard drive
- M.2 2230/2280 for solid-state drive

The primary drive of your computer varies with the storage configuration. For computers:

- 2.5 in. 5400 RPM, SATA hard drive
- M.2 2230/2280 for solid-state drive

**Table 6. Storage specifications**

Form factor	Interface type	Capacity
2.5 in. 5400 rpm, hard drive	SATA	upto 2 TB
M.2 2230 solid-state drive	PCIe NVMe 3x4	upto 512 GB
M.2 2280 solid-state drive	PCIe NVMe 3x4	upto 1 TB

# Ports and connectors

**Table 7. External ports and connectors**

Description	Values
<b>External:</b>	
Network	One Flip-down RJ 45 10/100/1000 Mbps
USB	<ul style="list-style-type: none"><li>• Two USB 3.2 Gen 1 Type-A port</li><li>• One USB 2.0 Type-A port</li></ul>
Audio	<ul style="list-style-type: none"><li>• One Universal audio port (Computers with Realtek audio configuration)</li></ul>

**Table 7. External ports and connectors (continued)**

Description	Values
	<ul style="list-style-type: none"> <li>One Audio jack (Computers with Cirrus logic audio configuration)</li> </ul>
Video	One HDMI 1.4 port ⓘ <b>NOTE:</b> The maximum resolution supported by HDMI port is 1920x1080 @60Hz (24 bit)
Power adapter port	4.5 mm barrel-type
Security	One Wedge shaped lock slot
Card slot	One SD 3.0 card slot

**Table 8. Internal ports and connectors**

Description	Values
<b>Internal:</b>	
One M.2 Key-M (2280 or 2230) for solid-state drive One M.2 2230 Key-E for WLAN	<ul style="list-style-type: none"> <li>One M.2 2230 slot for Wi-Fi</li> <li>One M.2 slot for 2230/2280 solid-state drive</li> </ul> ⓘ <b>NOTE:</b> To learn more about the features of different types of M.2 cards, see the knowledge base article <a href="#">SLN301626</a> .
SIM card	Not Supported

## Audio

**Table 9. Audio specifications**

Description	Values	
Controller	Realtek ALC3204	Cirrus CS8409 (CS42L42 + TI SN005825)
Stereo conversion	Supported	Supported
Internal interface	High definition audio	HDA bridge + CS42L42 audio codec
External interface	Universal Audio Jack	Headset jack ⓘ <b>NOTE:</b> 3.5mm headset jack functionality varies by model configuration. For best results, use Dell recommended audio accessories
Speakers	Two	Two
Internal-speaker amplifier	Supported	Supported
External volume controls	Keyboard shortcut controls	Keyboard shortcut controls
Speaker Output Average	2 W	2 W

**Table 9. Audio specifications (continued)**

Description	Values	
Speaker Output Peak	2.5 W	2.5 W
Subwoofer output	Not supported	Not supported
Microphone	Single digital microphone	Single digital microphone

## Video

**Table 10. Integrated graphics specifications**

Integrated graphics			
Controller	External display support	Memory size	Processor
Intel UHD Graphics	<ul style="list-style-type: none"> <li>One HDMI 1.4</li> </ul> <p><b>NOTE:</b> The maximum resolution supported by HDMI port is 1920x1080 @60Hz (24 bit)</p>	Shared system memory	<ul style="list-style-type: none"> <li>Intel 10th Generation Core i3 processors</li> </ul>

## Camera

**Table 11. Camera specifications**

Standard Webcam		
Description		Values
Number of cameras		One
Type		HD RGB camera
Location		Front Camera
Sensor type		CMOS sensor technology
Resolution:		
	Still image	0.92 megapixel
	Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle		78.6 degrees

## Communications

### Ethernet

**Table 12. Ethernet specifications**

Description	Values
Model number	Integrated Realtek RTL8111H
Transfer rate	e.g. 10/100/1000 Mbps



## Wireless module

**Table 13. Wireless module specifications**

Description	Values		
Model number	Intel 9462	Qualcomm QCA9377 (DW1810)	Realtek RTL8723DE
Transfer rate	Up to 433 Mbps	Up to 433 Mbps	Up to 150 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz
Wireless standards	<ul style="list-style-type: none"> <li>• WiFi 802.11a/b/g</li> <li>• Wi-Fi 4 (Wi-Fi 802.11n)</li> <li>• Wi-Fi 5 (Wi-Fi 802.11ac)</li> <li>• Wi-Fi 6 (WiFi 802.11ax)</li> </ul>	<ul style="list-style-type: none"> <li>• WiFi 802.11a/b/g</li> <li>• Wi-Fi 4 (Wi-Fi 802.11n)</li> <li>• Wi-Fi 5 (Wi-Fi 802.11ac)</li> </ul>	<ul style="list-style-type: none"> <li>• Wi-Fi 802.11 a/b/g</li> <li>• Wi-Fi 4 (WiFi 802.11n)</li> </ul>
Encryption	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>
Bluetooth	Bluetooth 5.0	Bluetooth 5.0	Bluetooth 4.2

## Keyboard

The following table lists the keyboard specifications of your Vostro 3501.

**Table 14. Keyboard specifications**

Description	Values
Keyboard type	<ul style="list-style-type: none"> <li>• Standard keyboard</li> <li>• White backlight keyboard</li> </ul>
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> <li>• United States and Canada: 101 keys</li> <li>• United Kingdom: 102 keys</li> <li>• Japan: 105 keys</li> </ul>
Keyboard size	X=18.7 mm key pitch Y=18.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p><b>NOTE:</b> You can define the primary behavior of the function keys (F1–F12) changing <b>Function Key Behavior</b> in BIOS setup program.</p>

# Touchpad

The following table lists the touchpad specifications of your Vostro 3501.

**Table 15. Touchpad specifications**

Description		Values
Touchpad resolution:		
	Horizontal	<ul style="list-style-type: none"> <li>• Synaptics: 1230</li> <li>• Lite-on: 1920</li> </ul>
	Vertical	<ul style="list-style-type: none"> <li>• Synaptics: 930</li> <li>• Lite-on: 1080</li> </ul>
Touchpad dimensions:		
	Horizontal	105 mm (4.13 in.)
	Vertical	65 mm (2.55 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article <a href="https://support.microsoft.com/4027871">4027871</a> at <a href="https://support.microsoft.com">support.microsoft.com</a> .

# Media-card reader

**Table 16. Media-card reader specifications**

Description	Values
Type	One Micro SD 3.0 card
Cards supported	<ul style="list-style-type: none"> <li>• Micro Secure Digital (mSD)</li> <li>• Micro Secure Digital High Capacity(mSDHC)</li> <li>• Micro Secure Digital Extended Capacity(mSDXC)</li> </ul>

# Power adapter

**Table 17. Power adapter specifications**

Description	Values	Values
Type	45 W	65 W
Connector dimensions:	4.5 mm x 2.9 mm	4.5 mm x 2.9 mm
Input voltage	100 VAC x 240 VAC	100 VAC x 240 VAC
Input frequency	50 Hz x 60 Hz	50 Hz x 60 Hz
Input current (maximum)	1.30 A	1.60 A / 1.70 A
Output current (continuous)	2.31 A	3.34 A
Rated output voltage	19.50 VDC	19.50 VDC
Temperature range:		

**Table 17. Power adapter specifications (continued)**

Description		Values	Values
	Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

## Battery

**Table 18. Battery specifications**


Description		Values
Type		42 WHr Polymer battery
Voltage		11.40 VDC
Weight (maximum)		0.2 kg (0.44 lb)
Dimensions:		
	Height	184.15 mm (7.25 in.)
	Width	97.15 mm (3.82 in.)
	Depth	5.90 mm (0.23 in.)
Temperature range:		
	Operating	0°C to 35°C (32°F to 95°F)
	Storage	-40°C to 65°C (-40°F to 149°F)
Operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Charging time (approximate)		4 hours (when the computer is off)  <i>i</i> <b>NOTE:</b> Dell recommends that you charge the battery regularly for optimal power consumption. If your battery charge is completely depleted, connect the power adapter, turn on your computer and then restart your computer to reduce the power consumption. Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on <a href="http://www.dell.com/">www.dell.com/</a>
Coin-cell battery		CR2032
Operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.

## Dimensions and weight

**Table 19. Dimensions and weight**

Description	Values
Height:	

**Table 19. Dimensions and weight (continued)**

Description		Values
	Front	18 mm (0.70 in.)
	Rear	19.90 mm (0.78 in.)
Width		363.96 mm (14.32 in.)
Depth		249 mm (9.80 in.)
Weight		<ul style="list-style-type: none"> <li>• Touch: 1.91 kg (4.21 lb)</li> <li>• Non-touch: 1.90 kg (4.18 lb)</li> </ul> <p> <b>NOTE:</b> The weight of your notebook depends on the configuration ordered and the manufacturing variability.</p>

## Display

**Table 20. Display specifications**

Description		Values	
Type		High Definition (HD)	Full High Definition (FHD)
Panel technology		TN (Twisted Nematic)	WVA (wide view angle)
Luminance (typical)		220 nits	220 nits
Dimensions (active area):			
	Height	193.54 mm (7.62 in.)	193.54 mm (7.62 in.)
	Width	344.23 mm (13.55 in.)	344.23 mm (13.55 in.)
	Diagonal	394.90 mm (15.54 in.)	394.90 mm (15.54 in.)
Native resolution		1366 x 768	1920 x 1080
Megapixels		1.05	2.07
Color gamut		NTSC 45% Typ.	NTSC 45% Typ.
Pixels per inch (PPI)		100	141
Contrast ratio (min)		400:1	400:1
Response time (max)		25 ms	35 ms
Refresh rate		60 Hz	60 Hz
Horizontal view angle		40 degrees	80 degrees
Vertical view angle		Top/Bottom 10/30 degrees	80 degrees
Pixel pitch		0.252 mm	0.179 mm
Power consumption (maximum)		4.2 W	4.2 W
Anti-glare vs glossy finish		Anti-glare	Anti-glare

**Table 20. Display specifications (continued)**

Description	Values	
Touch options	No	No

## Fingerprint reader

**Table 21. Fingerprint reader specifications**

Description	Values
Sensor technology	Capacitive
Sensor resolution	500 dpi
Sensor pixel size	80 x 64

## Security

**Table 22. Security specifications**

Features	Specifications
Trusted Platform Module (TPM) 2.0	Integrated on system board
Fingerprint reader	Optional
Wedge-shaped lock slot	Standard

## Security Software

**Table 23. Security Software specifications**

Specifications
Dell Client Command Suite
Optional Dell Data Security and Management Software Dell Client Command Suite Dell BIOS Verification Optional Dell Endpoint Security and Management Software VMware Carbon Black Endpoint Standard VMware Carbon Black Endpoint Standard + Secureworks Threat Detection and Response Dell Encryption Enterprise Dell Encryption Personal Carbonite VMware Workspace ONE Absolute® Endpoint Visibility and Control Netskope Dell Supply Chain Defense

# Computer environment

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

**Table 24. Computer environment**

<b>Description</b>	<b>Operating</b>	<b>Storage</b>
Temperature range	0°C to 40°C (32°F to 104°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	140 G†	160 G†
Altitude (maximum)	0 m to 3048 m (0 ft to 10000 ft)	0 m to 10668 m (0 ft to 35000 ft)

\* Measured using a random vibration spectrum that simulates user environment.



† Measured using a 2 ms half-sine pulse when the hard drive is in use.

# Getting help and contacting Dell

## Self-help resources


You can get information and help on Dell products and services using these self-help resources:


**Table 25. Self-help resources**

Self-help resources	Resource location
Information about Dell products and services	<a href="http://www.dell.com">www.dell.com</a>
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	<a href="http://www.dell.com/support/windows">www.dell.com/support/windows</a>
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at <a href="http://www.dell.com/support">www.dell.com/support</a> .  For more information on how to find the Service Tag for your computer, see <a href="#">Locate the Service Tag on your computer</a> .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> <li>1. Go to <a href="http://www.dell.com/support">www.dell.com/support</a>.</li> <li>2. On the menu bar at the top of the Support page, select <b>Support &gt; Knowledge Base</b>.</li> <li>3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.</li> </ol>

## Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [www.dell.com/contactdell](http://www.dell.com/contactdell).

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>